

## MOULD CON 03 DECOR

---

Finish

**MOULDCON**

---

600x1200mm | 9mm Thickness | 1 Face



## MOULD CON 02



---

Finish

**MOULD CON**

---

600x1200mm | 9mm Thickness | 5 Face

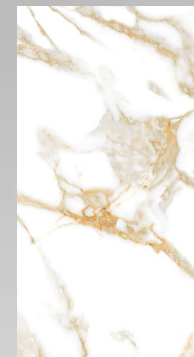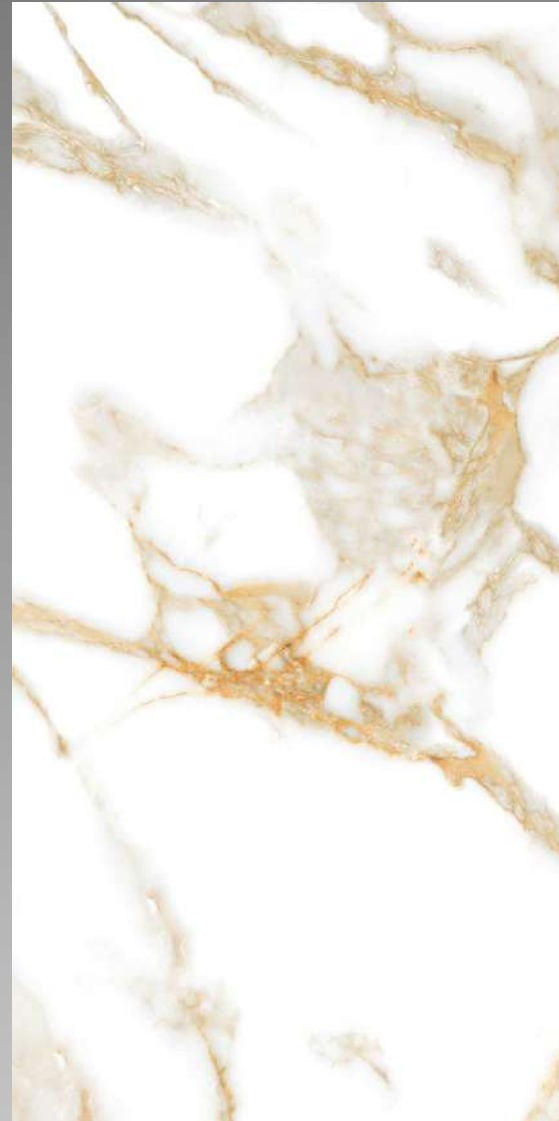

## MOULD CON 01 DECOR




---

Finish

**MOULDCON**

---

600x1200mm | 9mm Thickness | 1 Face

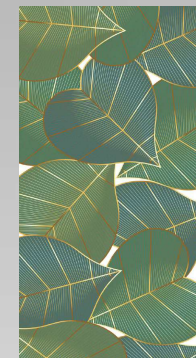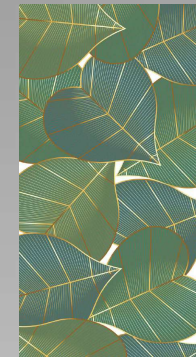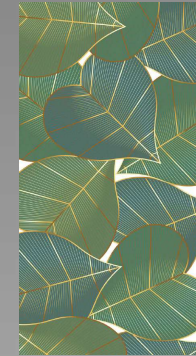

## MOULD CON 01 BASE



---

Finish

**MOULD CON**

---

600x1200mm | 9mm Thickness | 4 Face

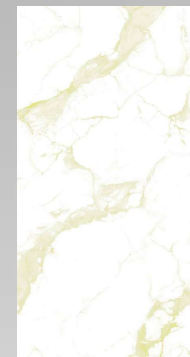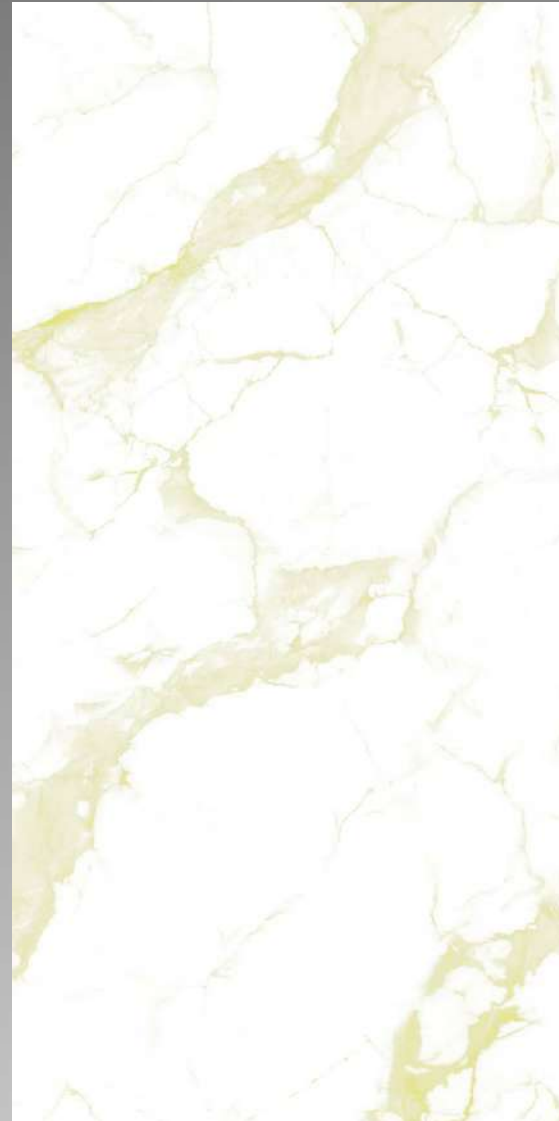

## MOULD CON 21

---

Finish

**MOULD CON**

---

600x1200mm | 9mm Thickness | 1 Face



## MOULD CON 18 DECOR




---

Finish

**MOULDCON**

---

600x1200mm | 9mm Thickness | 1 Face

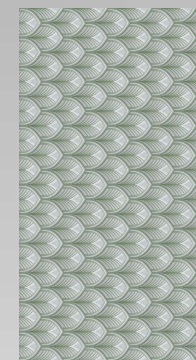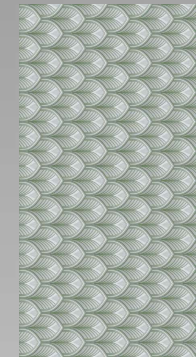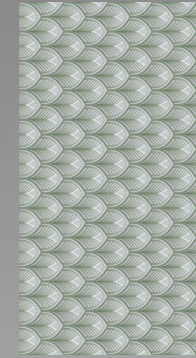

## MOULD CON 17

---

Finish

**MOULDCON**

---

600x1200mm | 9mm Thickness | 4 Face



## MOULD CON 12 DECOR

---

Finish

**MOULDCON**

---

600x1200mm | 9mm Thickness | 1 Face



## MOULD CON 10 DECOR

---

Finish

**MOULD CON**

---

600x1200mm | 9mm Thickness | 1 Face



## MOULD CON 09 DECOR

---

Finish

**MOULD CON**

---

600x1200mm | 9mm Thickness | 1 Face



# Technical Detail



| SRNO. | CHARACTERISTICS | ISO TEST METHODS | TILES REQUIREMENT AS PER<br>ISO 13006 : 2012 GROUP B LLB | OUR VALUE |
|-------|-----------------|------------------|----------------------------------------------------------|-----------|
|-------|-----------------|------------------|----------------------------------------------------------|-----------|

## DIMENSION & SURFACE QUALITY

|   |                             |             |         |         |
|---|-----------------------------|-------------|---------|---------|
| 1 | Deviation in length & Width | ISO 10545-2 | +/-0.5% | +/-0.2% |
| 2 | Deviation in Thickness      | ISO 10545-2 | +/-5%   | +/-3%   |
| 3 | Straightness Of sides       | ISO 10545-2 | +/-0.5% | +/-0.2% |
| 4 | Rectangularity              | ISO 10545-2 | +/-0.5% | +/-0.2% |
| 5 | Surface Flatness            | ISO 10545-2 | +/-0.5% | +/-0.2% |

## PHYSICAL & THERMAL PROPERTIES

|   |                                |              |                                                       |             |
|---|--------------------------------|--------------|-------------------------------------------------------|-------------|
| 1 | Water Absorption               | ISO 10545-3  | <0.50%                                                | < 0.04%     |
| 2 | Mohs Hardness                  | EN-101       | Min.5                                                 | Min.5       |
| 3 | Flexural Strength              | ISO 10545-4  | >35N/mm2                                              | >40N/mm2    |
| 4 | Skid Resistance                | ISO 10545-17 | >0.4                                                  | >0.4        |
| 5 | Breaking Strength              | ISO 10545-11 | >1113N                                                | >1800N      |
| 6 | Frost Resistance               | ISO 10545-12 | Frost Proof                                           | Frost Proof |
| 7 | Thermal Shock Resistance       | ISO 10545-9  | No Damage                                             | No Damage   |
| 8 | Moisture Expansion             | ISO 10545-10 | Nil                                                   | Nil         |
| 9 | Resistance to surface Abrasion | ISO 10545-7  | Abrasion class shall be specified by the manufacturer | PEI IV      |

## CHEMICAL PROPERTIES

|   |                      |              |           |           |
|---|----------------------|--------------|-----------|-----------|
| 1 | Chemicals Resistance | ISO 10545-13 | No Damage | No Damage |
| 2 | Color Resistance     | ISO 10545-16 | No Damage | No Damage |
| 3 | Stain Resistance     | ISO 10545-14 | Resistant | Resistant |

## PACKAGING DETAIL

| SIZE       | PCS./BOX | SQM./BOX | APPROX WEIGHT/BOX | THICKNESS |
|------------|----------|----------|-------------------|-----------|
| 600X1200MM | 2        | 1.44     | 29 KG             | 9MM       |
| 600X600MM  | 4        | 1.44     | 27.5 KG           | 8.5MM     |